

Fig. 1
(BACKGROUND)

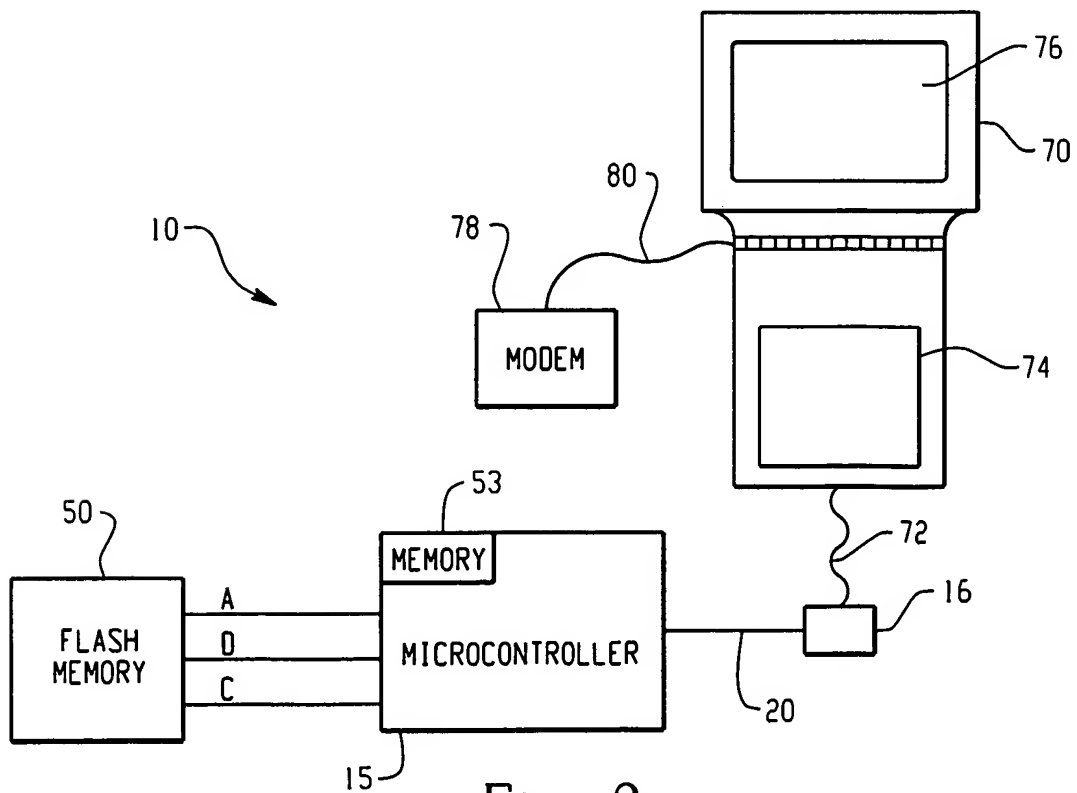


Fig. 2

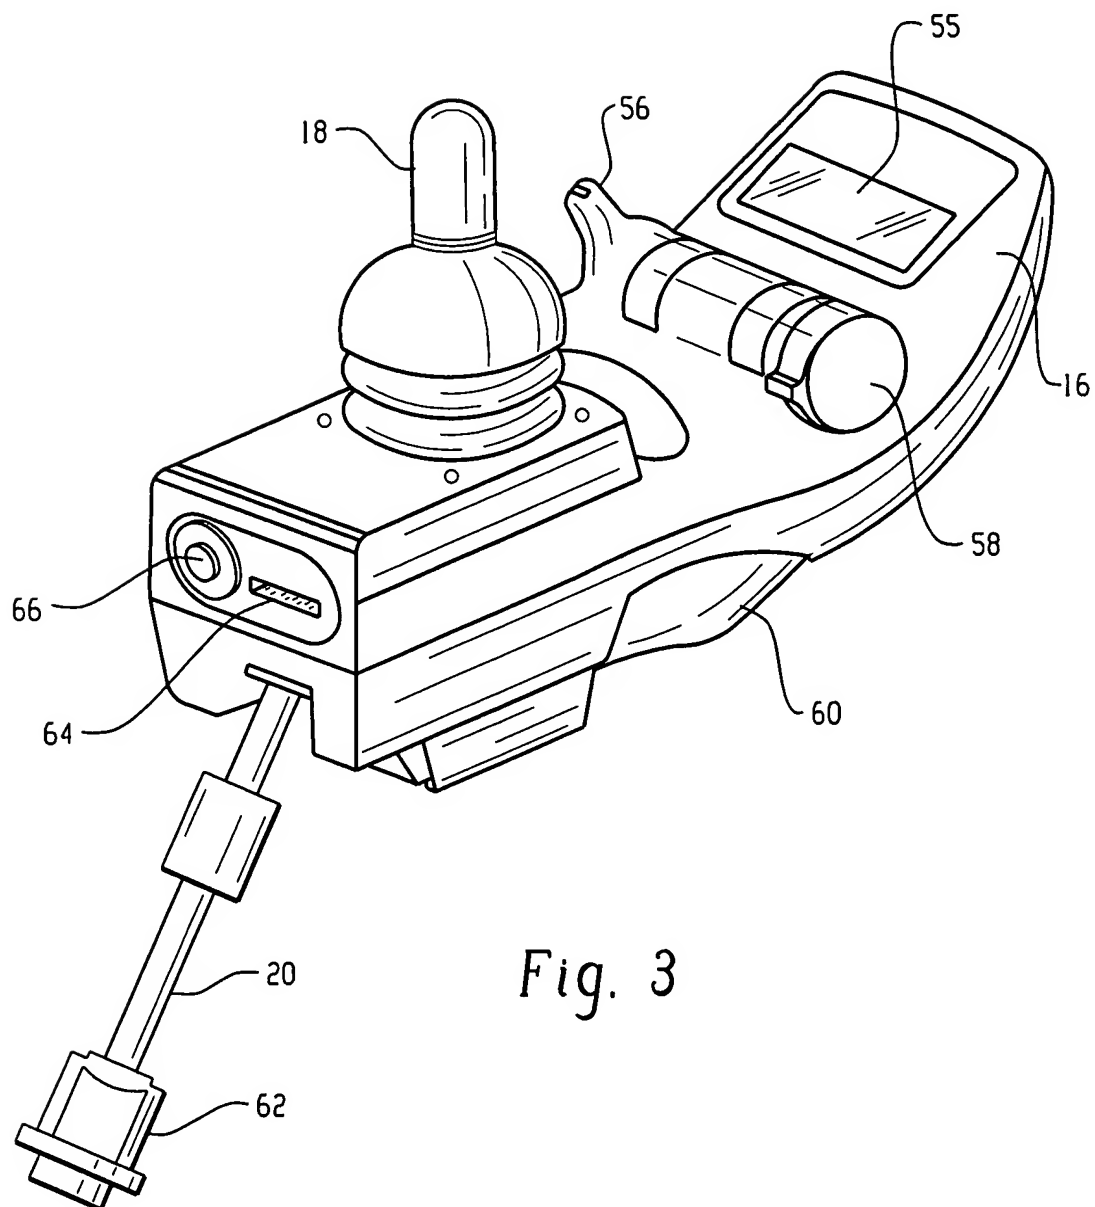


Fig. 3

3/6

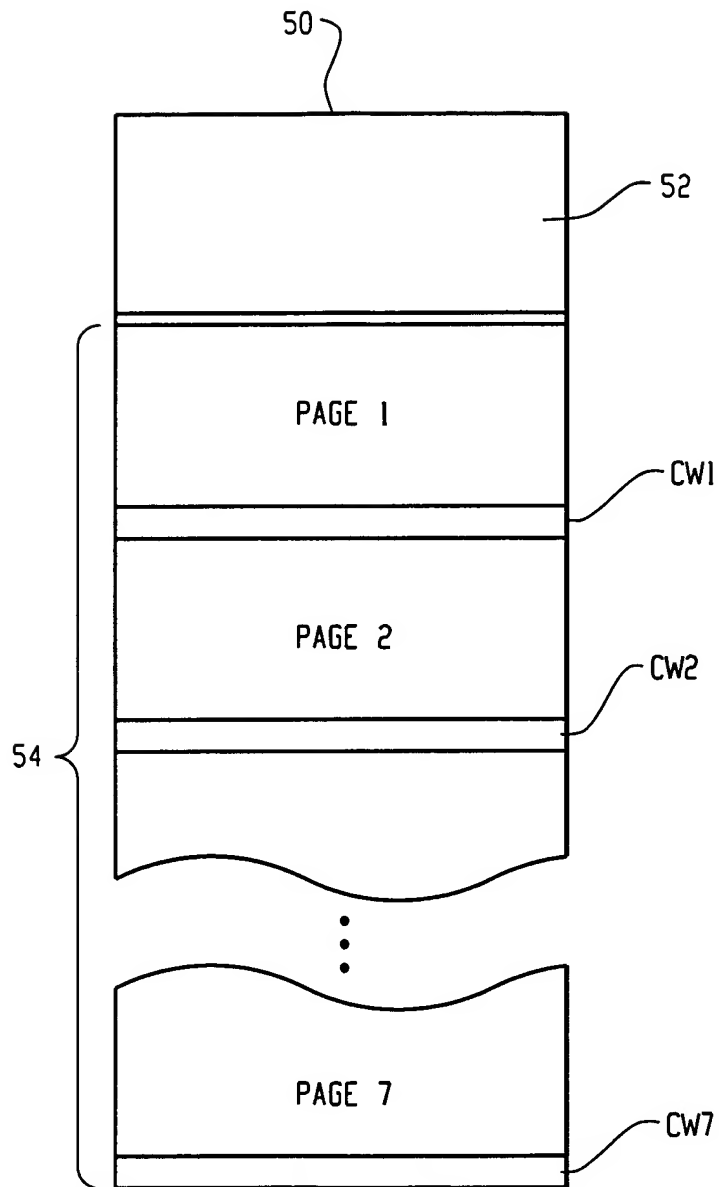


Fig. 4

4/6

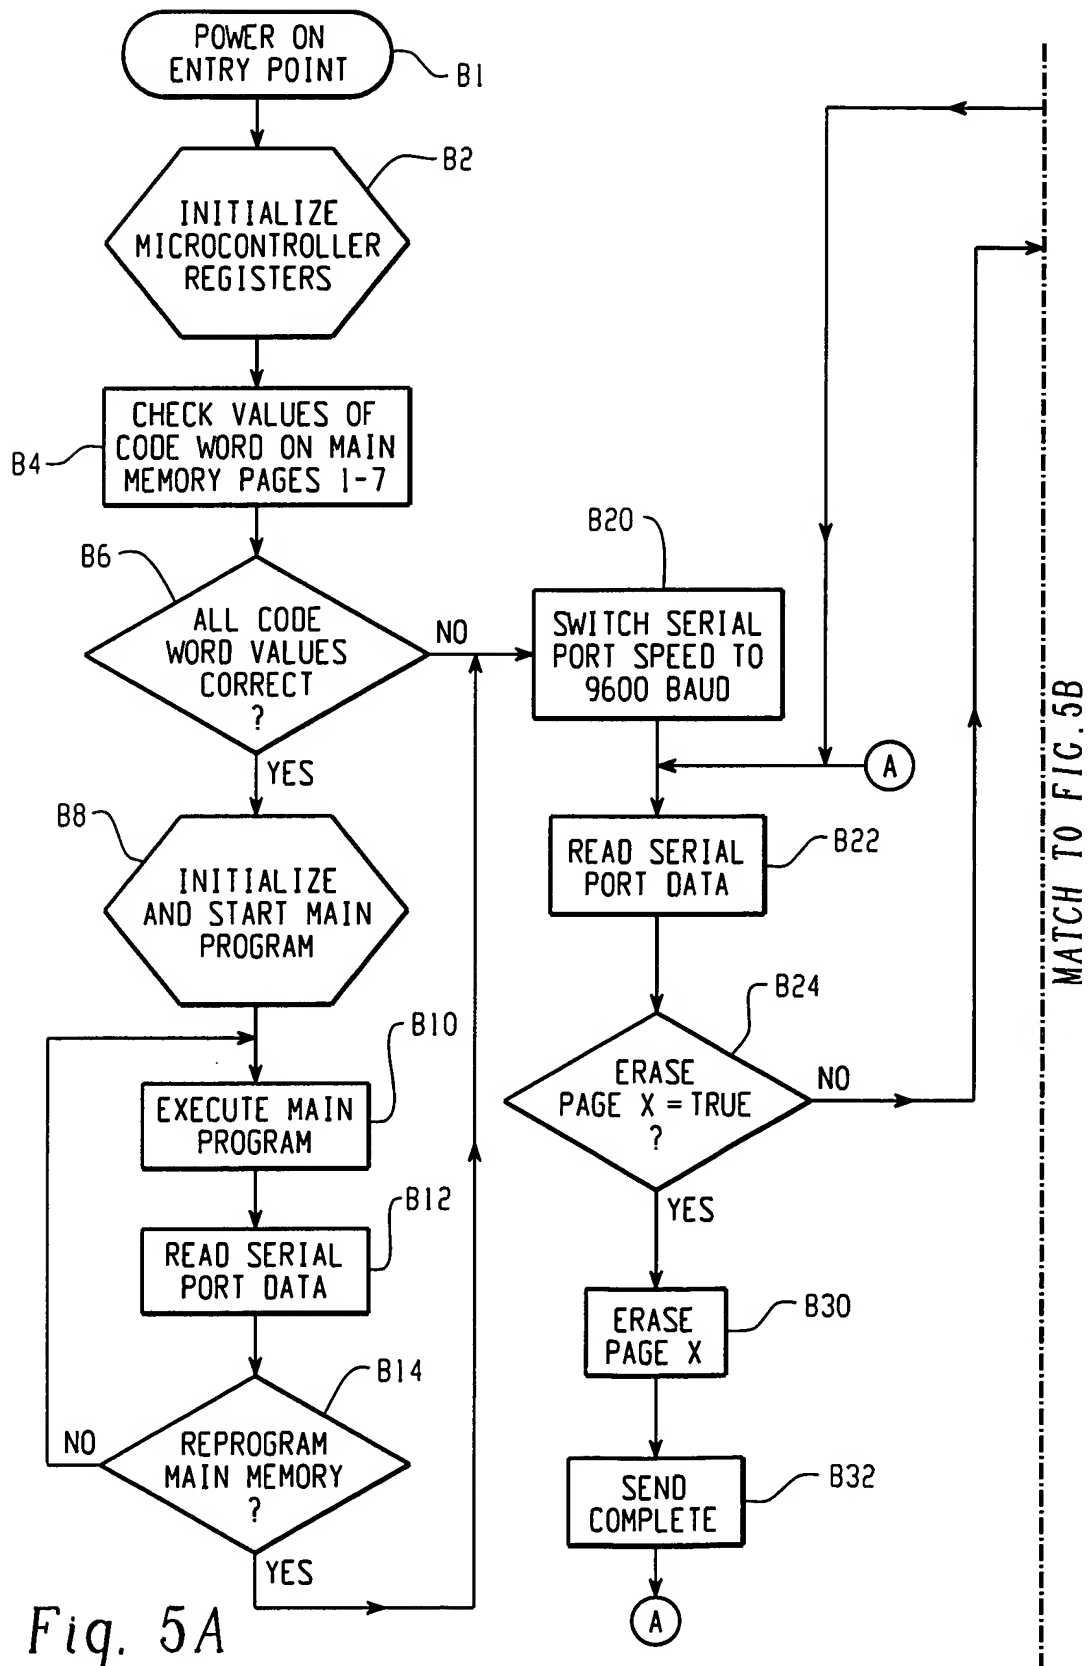


Fig. 5A

5/6

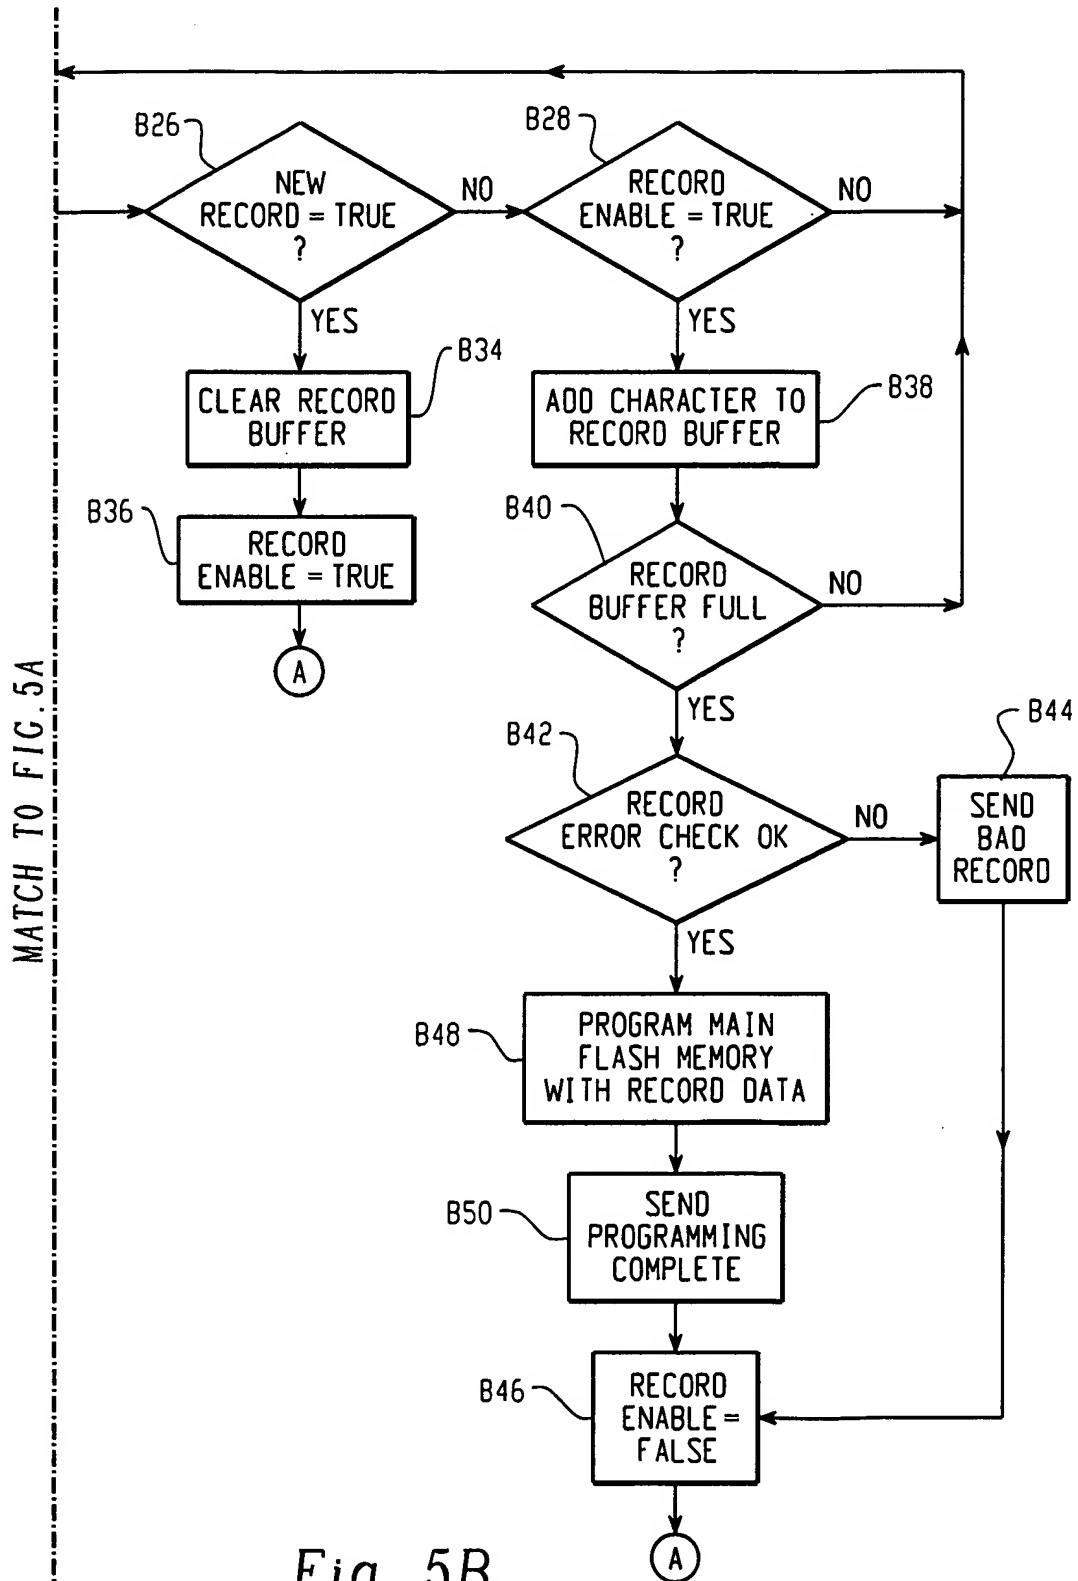


Fig. 5B

Fig. 6

9S12 Flash Programmer

d:\BRIEF\M5_9S12\m5gb3v56.s19

m5gb02july03.s19
m5gb08july03.s19
m5gb1.s19
m5gb25july03.s19
m5gb30july03.s19
m5gb3v56.s19
m5gball.s19
MotorCal3v53.s19

100
BRIEF
M5_9S12
BACKUP
CRC utility

Com 1 Com 2 Com 3 Com 4

File: 110 Version: 3.56 Product Code: 0

Controller: 118

Program Flash

Percent Flash Written:
Record number 629 of 1152 records written. (55%)

Step 1-Select the file to update the controller

Step 2-Select the correct com port.

Step 3-Click the file button to check the file version and product code.

Step 4-Click the Controller button to check the controller version and product code.

Step 5-Click the Program Flash to program the controller.

Erase Status:
Page 1: ...Erased!
Page 2: ...Erased!
Page 3: ...Erased!
Page 4: ...Erased!
Page 5: ...Erased!
Page 6: ...Erased!
Page 7: ...Erased!